



SAFETY DEVICES

- Main brake
- Overload detector.
- Tilt control.
- Working and safety cable.
- Cable safety coefficient.

e.lift / LEVA + securichute/ATURA

- Upper limit switch.
- Emergency push button.
- Phase detector.
- Emergency lowering.
- Overspeed detector.

TECHNICAL INFORMATION

Modular aluminium suspended platform designed for lifting people in accordance with EN1808.

The KOMPLET platform consists of 0.5, 1, 1.5 and 2 m aluminium elements, which are lightweight, easy to assemble, store and transport. The assembly is carried out by means of screws or dowels.

The components are small in size and allow passage through manholes or difficult to access places with a diameter of 750 mm. The same components allow working lengths from 0,5 to 2 m with a maximum load capacity of 240 kg.


The KOMPLET CABIN aluminium suspended platform is compatible with LEVA electric hoists, e.lift® 500, e.lift® 501, e.lift® 800 AND pneumatic hoist p.lift® 500.

To ensure personal safety, the platform uses a double cable system combined with Securichute® or ATURA fall arresters.

The KOMPLET CABIN aluminium suspended platform is available with different suspension systems (for facades, bridges, chimneys, parapets, patios, etc.).

Advantages:

- Unlimited working height.
- Quick and easy assembly and disassembly by means of screws or pins.
- Modularity, its elements allow from 0,5 to 2 m length of suspended scaffolding.
- Compatibility: electric, manual and pneumatic lifts.
- Available in three-phase 400 V or single-phase 230 V versions.
- Wide range of accessories.

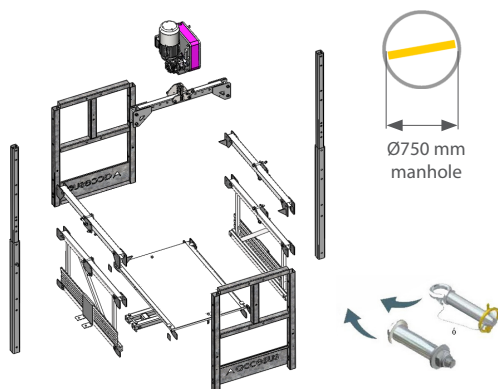


TECHNICAL FEATURES




Aluminium suspension platform Komplet Cabin	
Maximum total load capacity	240 kg
Maximum height	unlimited
Maximum length	2 m
Railing height	1 m
Minimum space where it can be disassembled	Ø 750 mm
Lifting speed	9 m/min(*)

(*) Disponible 18 m/min

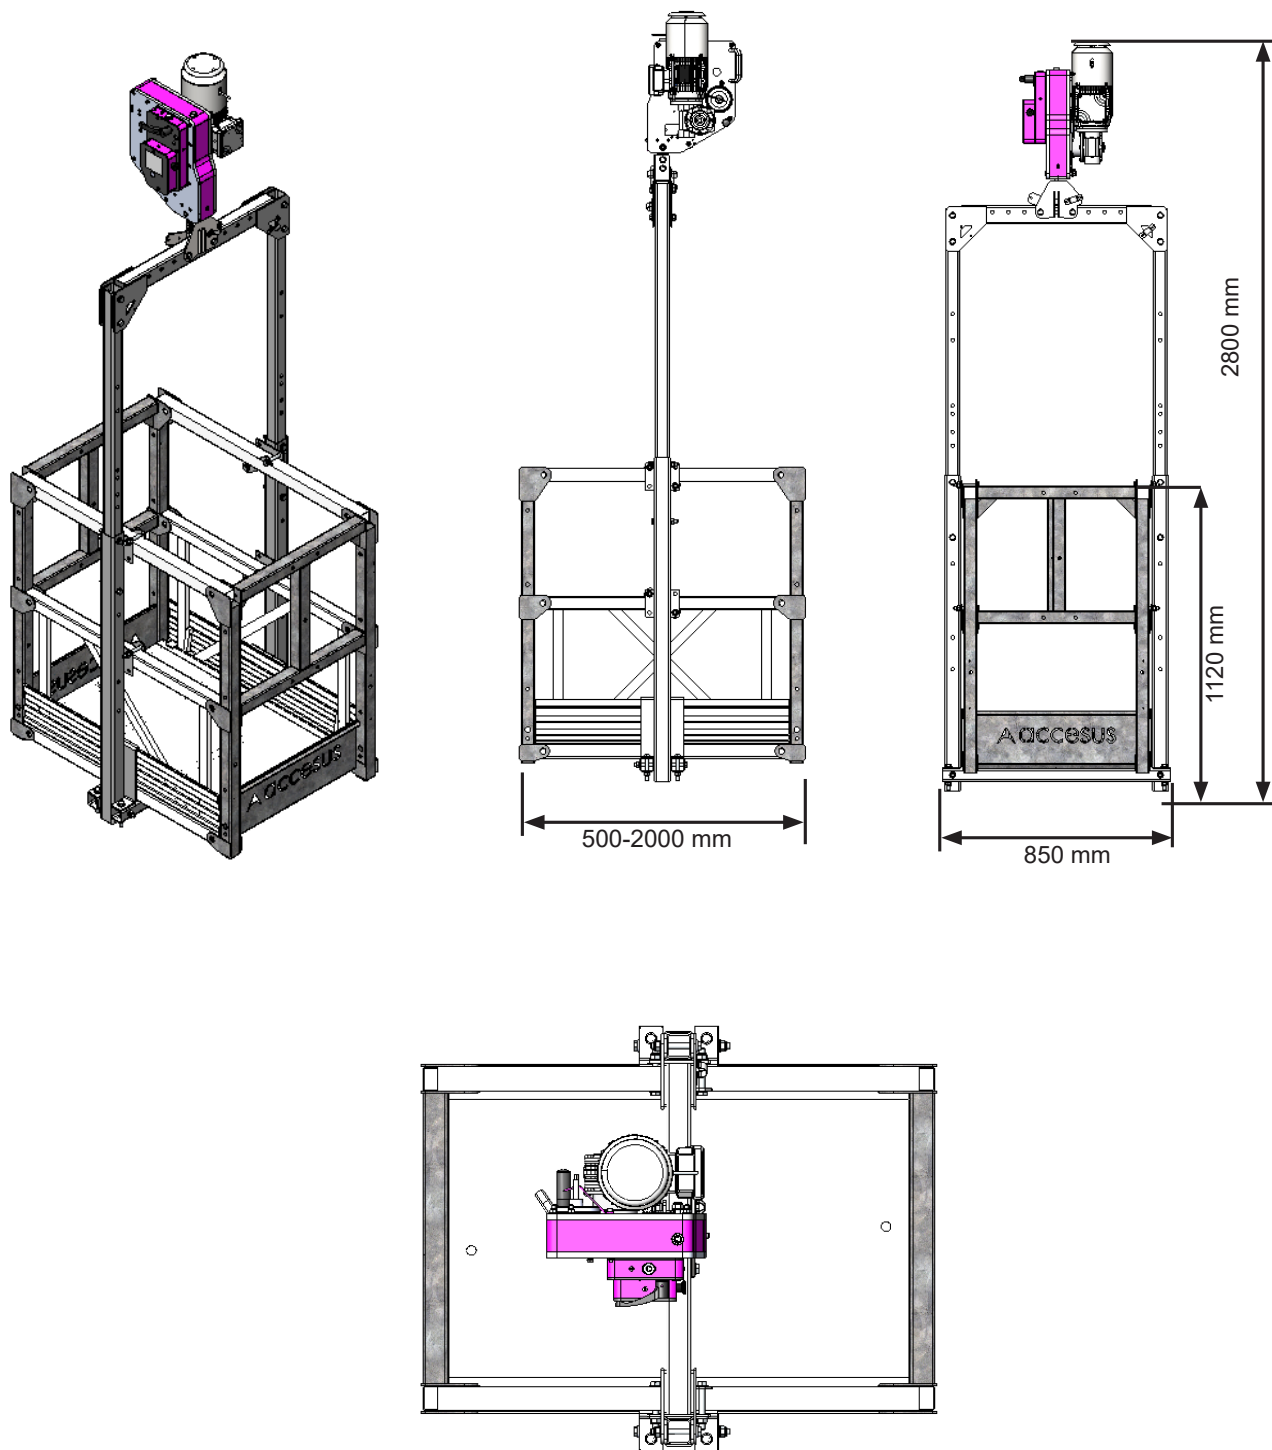ASSEMBLY WITH 1 PASS-THROUGH STIRRUP



LOADING CAPACITY

With 1 elevator		Cabin with carrier pass-through stirrup			
Elevador	Total length from the platform L (m)	0,5	1	1,5	2
Leva	 Weight load capacity (kg)	120	240	240	120
	 Number of people	1	2	2	1
	 Dead weight (kg)	170	180	190	200

		Cabin			
Element description	Platform length (m)	0,5	1	1,5	2
	Floor panel of 0,5m	1	0	1	0
	Floor panel of 1m	0	1	1	0
	Floor panel of 2m	0	0	0	1
	Connection stirrup	0	0	0	0
	Pass-through stirrup	1	1	1	1
	End panel	2	2	2	2
	Side panel of 0,5m	1	0	1	0
	Side panel of 1m	0	1	0	0
	Side panel of 2m	0	0	0	1
	Handrail of 0,5m	1	0	1	0
	Handrail of 1m	0	1	0	0
	Handrail of 2m	0	0	0	1
	Fasteners	12	12	12	12

